

## 1 Product composition

EQUITONE [pictura] sheets consist of the following:

- Portland cement
- mineral fillers
- natural organic reinforcing fibres
- synthetic organic reinforcing fibres
- double layer water-based acrylate dispersion with PU top coating UV hardened on the image side
- damp proof water-based coating on the back

## 2 Production method

EQUITONE [pictura] sheets are manufactured on a Hatschek machine and are double compressed and air-dried. The surface is smooth, not glossy, with double layer acrylic coating and a PU top coating UV hardened (front side) to produce a strong impact and dirt resistant finish. This finish makes a hard surface, scratch resistant and “anti graffiti” protection. The back side has a transparent water-based sealing.

## 3 Dimensions and tolerances

Thickness	Possible fixing method
8 mm	Adhesive, screws, rivets
12 mm	Invisible fixing with Tergo-system

Non-rectified	Rectified
1,280 x 2,530 mm	1,250 x 2,500 mm
1,280 x 3,130 mm	1,250 x 3,100 mm

For façade or ceiling applications only rectified boards may be used, non-rectified boards should not be used uncut.

Tolerances

	Non-rectified	After sawing
Thickness 8mm	+/- 0.8 mm	+/- 0.8 mm
12mm	+/- 1.0 mm	+/- 1.0 mm
Length and width	+/- 6.0 à mm	+/- 1.5 mm and +/- 1.0 mm if L x W < 1 x 1 m
Squareness	2.5 mm/m	1.0 mm/m

Weight (ex-works)

Thickness	Weight	1.280 x 2.530 mm	1.280 x 3.130 mm
8 mm	15.4 kg/m <sup>2</sup>	49.9 kg/sheet	61.7 kg/ sheet
12 mm	22.8 kg/m <sup>2</sup>	73.8 kg/ sheet	91.4 kg/ sheet

Thicknesses, sizes and types of the sheets which differ from those available as standard from stock are available subject to minimum order quantities. Please contact EURO PANELS OVERSEAS for more information.

## 4 Colour

EQUITONE [pictura] has a smooth silky surface.

For an overview of the standard colours we refer to the most recent EURO PANELS OVERSEAS colour chart. However it is technically impossible that this chart represents the colours realistically. Therefore the final choice of the colour has to be made with samples. Other colours are available upon request for minimum orders. The risk of colour differences between the various sheets decreases as the whole party is ordered at once.

Colour differences are measured according the CIELAB colour model. Tolerated colour differences are  $\Delta L^* = \pm 1.00$ ,  $\Delta a^* = \pm 0.75$ ,  $\Delta b^* = \pm 0.75$ . Color variegation may be accentuated by the effects of light and the viewing angle.

## 5 Technical properties

Average values according to the European standard EN 12467 'Fibre-cement flat sheets', which describes classification and most testing methods.

A. Testing according to ISO quality management system				
Density	Dry	EN 12467	≥1,650	kg/m <sup>3</sup>
Bending strength	Ambient, ⊥	EN 12467	26.0	N/mm <sup>2</sup>
	Ambient, //	EN 12467	17.0	N/mm <sup>2</sup>
Modulus of elasticity	Ambient, ⊥	EN 12467	15,000	N/mm <sup>2</sup>
	Ambient, //	EN 12467	15,000	N/mm <sup>2</sup>
Hygic movement	0-100%, mean		1.0	mm/m
Thermal movement			0.01	mm/mK
Porosity	0-100%		>20	%
B. Classification				
Durability classification		EN 12467	Category A	
Strength classification		EN 12467	Class 4	
Fire reaction		EN 13501-1	A2-s1-d0	
C. Type test or best estimate				
Impermeability test		EN 12467	Ok	
Warm water test		EN 12467	Ok	
Soak dry test		EN 12467	Ok	
Freeze thaw test		EN 12467	Ok	
Ball throwing resistance		DIN-18 032	Ok	
Water vapour resistance coef.	at 0 - 50 % rel. hum.		350	
	at 50 - 100 % rel. hum.		140	
Thermal expansion coefficient	α		< 0,01	mm/mK
Thermal conductivity	λ		0.6	W/mK

## 6 Advantages

Providing the application guidelines are followed, EURO PANELS OVERSEAS fibre-cement sheets have the following superior mix of properties compared to other materials:

- fire safe (no fire ignition, no spread of fire)
- sound insulating
- resistant to extreme temperatures
- water resistant (if in compliance with application guideline)
- resistant to many living organisms (fungi, bacteria, insects, vermin, etc.)
- resistant to many chemicals
- environmentally friendly, no harmful gas emissions

In addition, EQUITONE [pictura] has the following specific properties:

- strong and rigid sheet
- very natural appearance because of the semi-transparent coating
- high impact-resistance
- **anti graffiti protection**

## 7 Applications

- Façade: outside wall cladding, balcony panels, parapets, soffit

## 8 Available factory finishing

EQUITONE [pictura] can be supplied by EURO PANELS OVERSEAS cut to size. Holes 5 to 11 mm in diameter for visible fixing can be factory pre-drilled.

## 9 Application data

!!: Sawing and drilling must take place in a dry environment. For decorative applications, sawdust and drillings must be immediately removed from the sheet with a dry micro-fibre towel. Not removed sawdust and drillings can cause permanent stains.

During the mechanical machining of panels, adequate machinery with dust extraction and/or ventilation should be foreseen. If dust extraction is not efficient, dust masks of type FFP2 or better according EN149:2001 should be used.



### Cutting/Sawing:

When working on the sheet it must be sufficiently supported so that it does not sag. The sawing bench must be very stable and may not vibrate. The sheet may not be under tension when sawing. The sheet must be free of vibration and tension during sawing for a good saw cut. Cutting in the wrong way can cause delamination problems of the edge.

- Hand circular saw with rail or stationary sawing machines: fast rotation with Universal Euro Panels Overseas cutting blade available at Leitz-Service (available diameters: 160, 190, 225 and 300 mm)
- Jigsaw with carbide-tipped tooth cutting blade type T141 HM from Bosch (available from Euro Panels Overseas)
  - Sawed edges must be smoothed with sandpaper (grain P80)

### Drilling:

The sheet should be supported around the hole to be drilled (e.g. by a wooden surface).

- for holes: carbide-tipped twist drill (or completely in carbide) with a 60° nose angle (available from Euro Panels Overseas); available diameters: 5.0 – 6.0 – 7.0 – 8.3 – 9.5 – 11.0 mm
- for round apertures: hole saw with carbide-tipped teeth (e. g. type Pionier from Metabo)
  - Sawed edges must be smoothed with sandpaper (grain P80)

### Fastening accessories:


Depending on the application the following fastening accessories can be used (see application instructions for more information).

- Adhesive: is to be used in accordance with the application guidelines and guarantee conditions of the adhesive supplier.
- Screws: can be used in completely pre-drilled holes only.
- Rivets: can be used in completely pre-drilled holes only.
- Blind fixing with Tergo-system : only for 12 mm panels

### Sealant:

Only use neutral sealants. Non-neutral silicones or thiokols can result in spots.

## 10 Handling

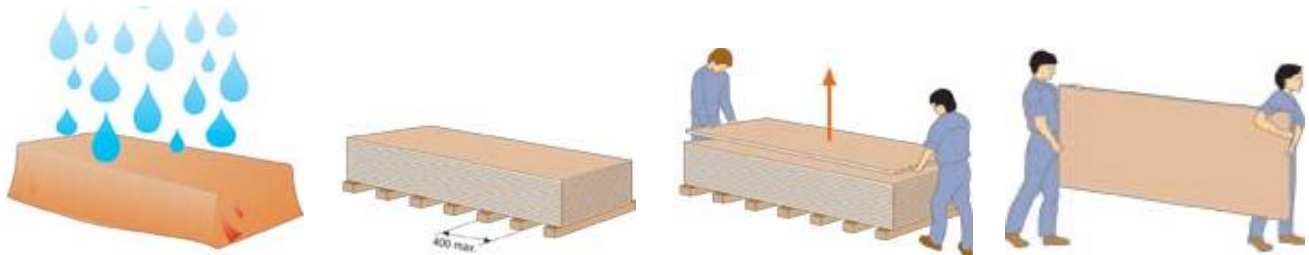

The sheets are packaged on pallets. They are to be transported under a tarpaulin. The sheets must be horizontally stacked on a flat surface. The sheets must always be sufficiently supported so that they do not sag. The sheets must be stacked in a dry ventilated space. If the sheets are stored outside, they must always be protected against rain by a tarpaulin or plastic cover. If the sheets do become wet in the packing, all packaging must be removed and placed in a way that they can dry out thoroughly. It is recommended to allow the sheets to acclimatise in the space where they are to be used. A sheet must always be lifted from a stack by two persons and then be carried vertically. A foil always has to remain between the stacked sheets in order to prevent paint damage.

## 11 Health and safety aspects

During the mechanical machining of panels, dust can be released which can irritate the airways and eyes. Apart from this, the inhalation of fine (respirable size) quartz containing dust, particularly when in high concentrations or over prolonged periods of time can lead to lung disease and an increased risk of lung cancer. Depending on the working conditions, adequate machinery with dust extraction and/or ventilation should be foreseen. For more ample information, please check the Safety Data Sheet according to 91/155/EEC.

## 12 Warranty

The warranty on the product is only valid if the EURO PANELS OVERSEAS application guidelines are respected. If in any doubt regarding the suitability of EURO PANELS OVERSEAS sheets in any given application, it is advisable to request specific recommendations from EURO PANELS OVERSEAS. Under no circumstances can EURO PANELS OVERSEAS be held liable for applications of their sheets implemented without approval from EURO PANELS OVERSEAS.

## 13 Maintenance and cleaning

For minor soiling, washing with a mild household detergent or soft soap solution followed by rinsing with clear water. Graffiti can easily be removed. Please consult the cleaning advice of EURO PANELS OVERSEAS.

## 14 Certification

The manufacturer can - within the framework of the European Regulation N° 305/2011 (CPR) - present the Declaration of Performance (DOP) of the product such confirming that the product has a CE marking. The CE marking guarantees that the product is in accordance with the basic requirements determined by the harmonized European standard and applicable to the product. The Declaration of Performance is presented in accordance with the CPR and can be found at [www.infodop.com](http://www.infodop.com). The products are delivered with the KOMO-certificate. The manufacturer is also ISO certified. EQUITONE [pictura] has an EPD (Environmental Product Declaration).

**K41115**

## 15 More information

Information about the various applications can be found in the EURO PANELS OVERSEAS application guidelines. They can be found on the website or be obtained on demand by phone. Information about external suppliers can also be downloaded from the website.

This product information sheet replaces any previous editions. EURO PANELS OVERSEAS reserves the right to amend this information sheet without prior notice. Readers should always satisfy themselves that they are referring to the most recent version of this document. No part of this text can be changed without permission of EURO PANELS OVERSEAS.

**EUROPANELS**  
european quality for drywall, cladding and roofing

p.o. Central Services  
Kuijermansstraat 1  
B-1880 Kapelle-op-den-Bos  
Belgium  
Tel 0032 (0)15 71 73 80  
Fax 0032 (0)15 71 73 89  
[info@europanel.net](mailto:info@europanel.net)  
[www.europanel.net](http://www.europanel.net)

Registered office address: Bormstraat 24, B-2830 Willebroek - BELGIUM