



terra antiga

THE EXCELLENCE OF RUSTIC





TERRA ANTIGA




Soladrilho has been recreating natural floor tiles for three decades with absolute respect to the transformation and essence of the main product - clay. Soladrilho's dynamic production offers a variety of traditional and modern products.

Due to Soladrilho's latest technology platform 8,500 m² of extruded ceramic floor and wall tiles. Soladrilho is recognized internationally for the high quality of its products.

One of Portugal's greatest inheritances is the knowledge on how to work clay. This influence, among many others, was left by the Romans since II A.C. when they first marked their presence on land. The Terra Antiga Collection was influenced by the names of Roman villages, such as: Scallabis, Egítania, Myrtis and Ebora. These are the names that give life to the different products of this collection. Terra Antiga floor tiles are available in the following formats: 33x33 cm, 33x16,5 cm and 16,5x16,5 cm.

FLOOR TILES

FLOORING FORMATS

		SERIE 11 REF.	SERIE 13 REF.	SERIE 14 REF.	SERIE 16 REF.
	33x33	1163150	1363150	1463150	1663150
	16.5x16.5	1163103	1363103	1463103	1663103
	33x16.5	1163109	1363109	1463109	1663109












Series 11 - Scallabis



Series 16 - Ebora

TECHNICAL FEATURES

TECHNICAL FEATURES	NORMS	TERRA ANTIGA
 LINEAR THERMAL EXPANSION COEFFICIENT	NP EN ISO 10545 - 8	< 6,5 x 10 ⁻⁶ /°C
 THERMAL SHOCK RESISTANCE	NP EN ISO 10545 - 9	CUMPRE
 FROST RESISTANCE	NP EN ISO 10545 - 12	CUMPRE
 FLEXION RESISTANCE	NP EN ISO 10545 - 4	23 N/mm ²
 SURFACE HARDNESS (MOHS SCALE)	EN 101	8
 CHEMICAL RESISTANCE	NP EN ISO 10545 - 13	UA, UHA
 WATER ABSORPTION	NP EN ISO 10545 - 3	4,5%
 DEEP ABRASION RESISTANCE	NP EN ISO 10545 - 6	< 400 mm ³
 SLIPPING RESISTANCE	DIN 51097 DIN 51130	C R11

IMPORTANT NOTE: Soladrilho's tiles are produced with natural clays and through an extrusion process, which can create slight differences in shades; sizes and textures between tiles; lots and tile accessories.


With Terra Antiga's product line, tiles should be placed with texture positioned in the same direction, and tiles should be laid with cement glue. Additional cuts should be made with and electrical cutting machine (water cutting machine), in order to obtain a regular cut.

Joint between tiles should have a 7 mm width; we don't recommend the use of crosspieces. When applying tiles it is necessary to create a joint perimeter of at least 10 mm, which helps the absorption of all tensions created by the building's structure. This absorption in the joint prevents direct transmissions to the floor tiles; preventing them from lifting.

A correct filling of the joints is key to a good finish; therefore we don't recommend the application of colored fillings, for example black, anthracite or graphite.

APPLY, TREAT AND MAINTAIN

Treatment Diagram for Natural Floor Tiles (before filling joints)

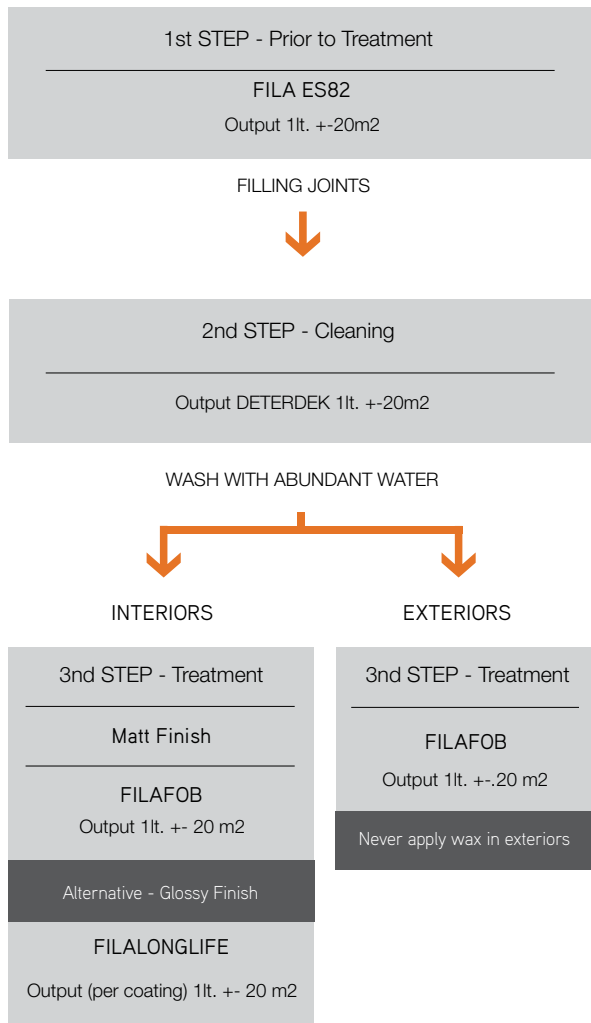

(Treatment for Soladriho's oil repellent floor tiles)

DETERDEK

To obtain a matte finish on natural or oil repellent floor tiles we recommend the use of DETERDEK cleaning product.

SOLCIM PLUS

To obtain a shiny finish on oil repellent floor tiles we recommend the use of FILALONGLIFE cleaning product.

When joints are filled, the treatment should be completed as follows: 2nd step – 1st step – 3rd step.

